
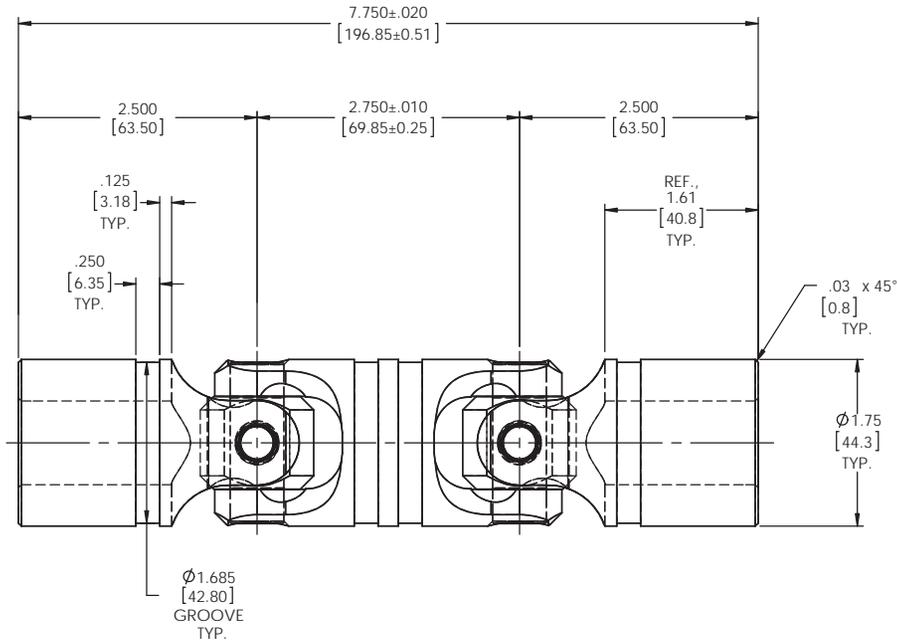


INFORMATION IN THIS DRAWING
PROVIDED FOR REFERENCE ONLY

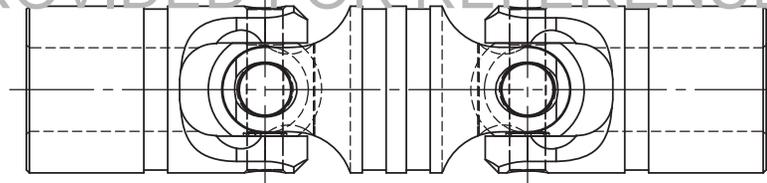

Ø.876^{+.000}_{-.001}
[22.25 0 -0.03]
✓ Ø.94 X 90° INCL.
[23.8]

TYPICAL BOTH ENDS

NOTE(s), UNLESS OTHERWISE SPECIFIED.

- (1) UNIVERSAL JOINT IS MARKED w/ "BELDEN" LOGO, PART NUMBER / DRAWING NUMBER, REVISION LEVEL (IF ANY), DATE OF MANUFACTURE (MO/YR), AND BELDEN JOB NUMBER.
- (2) UNIVERSAL JOINT IS LUBRICATED w/ LUBRIPLATE 1200-2, NLGI GRADE 2, AW/EP, LITHIUM GREASE OR EQUIVALENT.
- (3) UNIVERSAL JOINT IS CAPABLE OF OPERATING AT ANY ANGLE UP TO AND INCLUDING 45°, 90° FOR THE DOUBLE UNIVERSAL JOINT.
- (4) UNIVERSAL JOINT HAS STANDARD GROOVES TO ACCEPT INSTALLATION OF PROTECTIVE COVERS (BOOTS). BOOTS AVAILABLE SEPARATELY. REFER TO BELDEN CATALOG, WEBSITE, OR CONTACT BELDEN SALES.
- (5) REFER TO BELDEN CATALOG, WEBSITE, OR CONTACT BELDEN SALES FOR TORQUE CAPACITY.
- (6) THIS DRAWING REPRESENTS A STANDARD BELDEN ITEM. CUSTOM UNIVERSAL JOINTS ARE AVAILABLE UPON REQUEST. PLEASE CONTACT BELDEN SALES.

BELDEN PART NUMBER: DUJ-HD1750x875

DO NOT SCALE DRAWING

<small>UNLESS OTHERWISE SPECIFIED CHAMFER ALL HOLES BREAK ALL SHARP CORNERS DE-BURR ALL FEATURES</small>	<small>STANDARD TOLERANCES, UNLESS OTHERWISE SPECIFIED</small>		<small>MATERIAL</small> ALLOY STEEL		<small>REVISIONS</small>	
	<small>DIMENSIONS ARE IN INCHES [mm]</small>		<small>NAME</small> JP		<small>DATE</small> 23 JUL 12	
	<small>TURNED SURFACES: $\sqrt{6.3}$</small> <small>FRACTIONAL: $\pm 1.0^*$</small> <small>TWO PLACE DECIMAL: $\pm 0.15^*$</small> <small>THREE PLACE DECIMAL: $\pm 0.10^*$</small> <small>FOUR PLACE DECIMAL: $\pm 0.05^*$</small> <small>MILLED SURFACES: $\sqrt{125}$</small> <small>CONCENTRICITY: $\pm 0.005^*$ T.I.R.</small>		<small>HEAT TREAT</small> SEE DETAIL DRAWINGS		<small>CHECKED</small> RNK 24 JUL 12	
	<small>PROPRIETARY AND CONFIDENTIAL</small> <small>THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF BELDEN INCORPORATED. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF BELDEN INCORPORATED IS PROHIBITED.</small>		<small>FINISH</small> NONE		<small>ENG APPR</small> RNK 24 JUL 12	
<small>ALL HOLES TO BE LOCATED ON CENTERLINE (C) WITHIN .005" T.I.R.</small> <small>INTERPRET GEOMETRIC TOLERANCES I.A.W. ANSI Y14.5M-1992</small>			<small>MFG APPR</small> 		<small>TITLE</small> ASS'Y, DOUBLE UNIVERSAL JOINT	
<small>SCALE: 1:1</small>			<small>COMMENTS</small> 		<small>SIZE</small> C	
<small>WT (Lbs): 3.683</small>			<small>DWG. NO.</small> DUJ-HD1750x875		<small>REV</small> 	
<small>SHEET 1 OF 2</small>						