


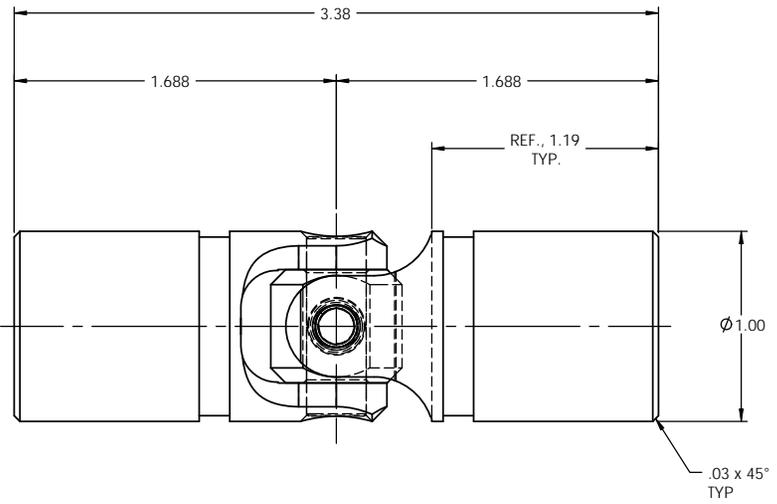
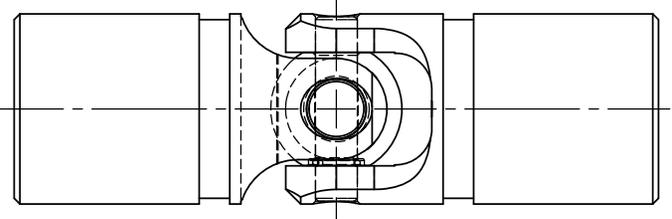


REVISIONS				
ZONE	REV.	DESCRIPTION	DATE	APPROVED

INFORMATION IN THIS DRAWING PROVIDED FOR REFERENCE ONLY

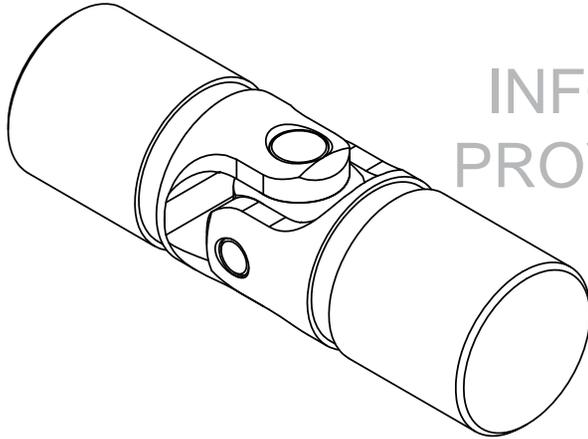

NOTE(s), UNLESS OTHERWISE SPECIFIED.

- (1) UNIVERSAL JOINT IS MARKED w/ "BELDEN" LOGO, PART NUMBER / DRAWING NUMBER, REVISION LEVEL (IF ANY), DATE OF MANUFACTURE (MO/YR), AND BELDEN JOB NUMBER.
- (2) UNIVERSAL JOINT IS LUBRICATED w/ LUBRIPLATE 1200-2, NLGI GRADE 2, AW/EP, LITHIUM GREASE OR EQUIVALENT.
- (3) UNIVERSAL JOINT IS CAPABLE OF OPERATING AT ANY ANGLE UP TO AND INCLUDING 45°.
- (4) UNIVERSAL JOINT HAS STANDARD GROOVES TO ACCEPT INSTALLATION OF PROTECTIVE COVER (BOOT). BOOT AVAILABLE SEPARATELY. REFER TO BELDEN CATALOG, WEBSITE, OR CONTACT BELDEN SALES.
- (5) REFER TO BELDEN CATALOG, WEBSITE, OR CONTACT BELDEN SALES FOR TORQUE CAPACITY.
- (6) THIS DRAWING REPRESENTS A STANDARD BELDEN ITEM. CUSTOM UNIVERSAL JOINTS ARE AVAILABLE UPON REQUEST. PLEASE CONTACT BELDEN SALES.

BELDEN PART NUMBER: UJ-HD1000x00

BREAK ALL SHARP CORNERS AND DE-BURR UNLESS OTHERWISE SPECIFIED. PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF BELDEN INC. OR ITS AFFILIATES. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF BELDEN INCORPORATED IS PROHIBITED.			UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES TOLERANCES: FRACTIONAL: ±1/32 ANGULAR MACHINED: ±0.5° TWO PLACE DECIMAL: ±0.010 THREE PLACE DECIMAL: ±0.005 FOUR PLACE DECIMAL: ±0.0005 INTERSECT GEOMETRIC TOLERANCES I.A.W. ANSI Y14.5M-1982	NAME: RNK DATE: 16SEP09	BELDEN INCORPORATED www.beldenuniversal.com TITLE: ASSEMBLY, UNIVERSAL JOINT
	NEXT ASSY: USED ON: APPLICATION: 	MATERIAL: ALLOY STEEL FINISH: NONE DO NOT SCALE DRAWING	CHECKED: RNK DATE: 16SEP09 ENG APPR: RNK DATE: 16SEP09 MFG APPR: DATE: COMMENTS:	SIZE: C DWG. NO.: UJ-HD1000x00 REV: SCALE: 2:1 WT (Lbs): 0.642 SHEET 1 OF 2	