APPROVED

REVISIONS				
ZONE	REV.	DESCRIPTION	DATE	APPROVED

INFORMATION IN THIS DRAWING
PROVIDED FOR REFERENCE ONLY

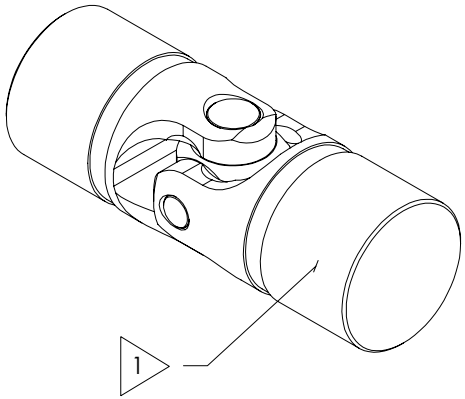

SCALE 1 : 1

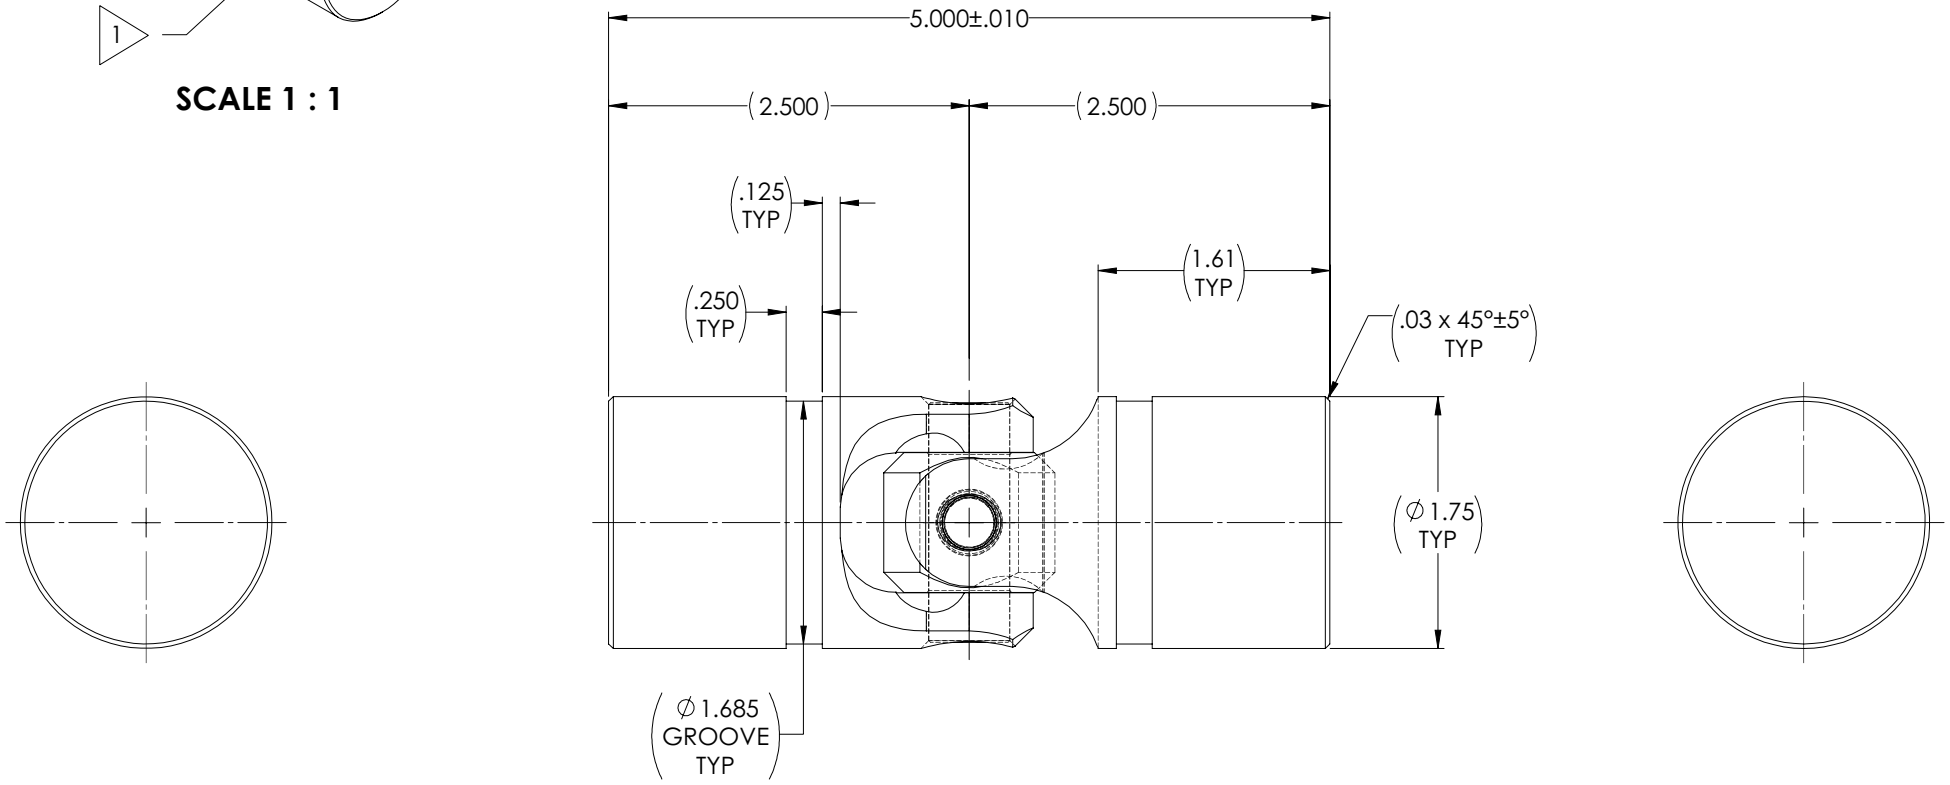

NOTE(s), UNLESS OTHERWISE SPECIFIED.

1. MARK ASSEMBLY w/ "BELDEN" LOGO, PART NUMBER, REVISION LEVEL, DATE OF MANUFACTURE (MO/YR) & BELDEN JOB No.

(2) LUBRICATE U-JOINT w/ LUBRIPLATE # 1200-2, NLGI GRADE 2, AW/EP, LITHIUM GREASE OR EQUIVALENT.

(3) MATERIAL: TYPE 316/316L STAINLESS STEEL.

(4) REF., MAXIMUM OPERATING ANGLE: 45°

DO NOT SCALE DRAWING

UNLESS OTHERWISE SPECIFIED
CHAMFER ALL HOLES
BREAK ALL SHARP CORNERS
DE-BURR ALL FEATURES
TURNED SURFACES: 63
MILLED SURFACES: 125

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF BELDEN UNIVERSAL. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF BELDEN UNIVERSAL IS PROHIBITED.

STANDARD TOLERANCES, UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE IN INCHES [mm]
ANGULAR MACHINED: ±1.0°
FRACTIONAL: ±.015"
TWO PLACE DECIMAL: ±.010"
THREE PLACE DECIMAL: ±.005"
FOUR PLACE DECIMAL: ±.0005"
CONCENTRICITY: .0025" T.I.R.
ALL HOLES TO BE LOCATED ON CENTERLINE (℄) WITHIN .005" T.I.R.
INTERPRET GEOMETRIC TOLERANCES I.A.W. ASME Y14.5

MATERIAL: REF., TYPE 316/316L STAINLESS STEEL
HEAT TREAT: NONE
FINISH: NONE

	INITIALS	DATE
DRAWN	JP	09MAR22
CHECKED	RNK	03/09/2022
ENG APPR.	RNK	03/09/2022
MFG APPR.		
QC APPR.		

COMMENTS:

Belden Universal
www.beldenuniversal.com

TITLE: ASSEMBLY, UNIVERSAL JOINT

SIZE	DWG. NO.	REV
A	UJ-SS1750-316x00	A

SCALE: 1.5:1 | WT (Lbs): 2.969 | SHEET 1 OF 2