

REVISIONS

ZONE REV. DESCRIPTION DATE APPROVED

## INFORMATION IN THIS DRAWING PROVIDED FOR REFERENCE ONLY

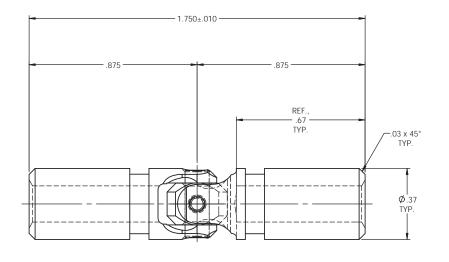



TYPICAL BOTH ENDS

## NOTE(s), UNLESS OTHERWISE SPECIFIED.

- (1) UNIVERSAL JOINT IS MARKED W/ "BELDEN" LOGO, PART NUMBER / DRAWING NUMBER, REVISION LEVEL (IF ANY), DATE OF MANUFACTURE (MO/YR), AND BELDEN JOB NUMBER.
- (2) UNIVERSAL JOINT IS LUBRICATED w/ LUBRIPLATE 1200-2, NLGI GRADE 2, AW/EP, LITHIUM GREASE OR EQUIVALENT.
- (3) UNIVERSAL JOINT IS CAPABLE OF OPERATING AT ANY ANGLE UP TO AND INCLUDING 45°.
- (4) UNIVERSAL JOINT HAS STANDARD GROOVES TO ACCEPT INSTALLATION OF PROTECTIVE COVER (BOOT). BOOT AVAILABLE SEPARATELY. REFER TO BELDEN CATALOG, WEBSITE, OR CONTACT BELDEN SALES.
- (5) REFER TO BELDEN CATALOG, WEBSITE, OR CONTACT BELDEN SALES FOR TORQUE CAPACITY.
- (6) THIS DRAWING REPRESENTS A STANDARD BELDEN ITEM.
  CUSTOM UNIVERSAL JOINTS ARE AVAILABLE UPON REQUEST. PLEASE CONTACT BELDEN SALES.

## BELDEN PART NUMBER: UJ-SS375x188

## DO NOT SCALE DRAWING

| DO NOT SCALE DIAWNING                                                   |                                                            |                                |           |      |         |         |                             |          |
|-------------------------------------------------------------------------|------------------------------------------------------------|--------------------------------|-----------|------|---------|---------|-----------------------------|----------|
| UNLESS OTHERWISE SPECIFIED                                              | STANDARD TOLERANCES,<br>LINLESS OTHERWISE SPECIFIED        | MATERIAL CT A IN IL ECC. CTEEL |           | NAME | DATE    |         | Belden Incorporat           | ed       |
| BREAK ALL SHARP CORNERS                                                 |                                                            | STAINLESS STEEL                | DRAWN     | JP   | 16OCT12 |         | www.beldenuniversal.c       | om       |
| DE-BURR ALL FEATURES                                                    | DIMENSIONS ARE IN INCHES [mm]                              | HEAT TREAT                     | CHECKED   | RNK  | 16OCT12 | TITLE:  |                             |          |
| TURNED SURFACES: 63                                                     | ANGULAR MACHINED: ±1.0°<br>FRACTIONAL: ±.015"              | SEE DETAIL                     | ENG APPR. | RNK  | 16OCT12 |         | ASSEMBLY,                   |          |
| 125/                                                                    | TWO PLACE DECIMAL: ±.010"                                  | DRAWINGS                       | MFG APPR. |      |         |         | UNIVERSAL JOL               | NIT      |
| MILLED SURFACES: V                                                      | THREE PLACE DECIMAL: ±.005"<br>FOUR PLACE DECIMAL: ±.0005" |                                | Q.A.      |      |         |         | UNIVERSAL JOI               | N I      |
| PROPRIETARY AND CONFIDENTIAL                                            | CONCENTRICITY: .0025" T.I.R.                               |                                | COMMENTS: |      |         |         |                             |          |
| THE INFORMATION CONTAINED IN THIS                                       | ALL HOLES TO BE LOCATED ON                                 | FINISH                         |           |      |         | SIZE    | DWG. NO.                    | REV      |
| DRAWING IS THE SOLE PROPERTY OF<br>BELDENINCORPORATED. ANY              | CENTERLINE (Q ) WITHIN .005" T.I.R.                        | NONE                           |           |      |         | C       | U.J-SS375x188               |          |
| REPRODUCTION IN PART OR AS A WHOLE<br>WITHOUT THE WRITTEN PERMISSION OF | INTERPRET GEOMETRIC TOLERANCES                             |                                |           |      |         | $lue{}$ |                             |          |
| BELDEN INCORPORATED IS PROHIBITED.                                      | I.A.W. ANSI Y14.5M-1982                                    |                                |           |      |         | SCAL    | E: 4:1 WT (Lbs): 0.037 SHEE | T 1 OF 2 |
|                                                                         | 2                                                          |                                |           |      |         | $\neg$  |                             |          |